



TYPE _____

CATALOG# _____


LG-150

NOBLER SERIES

14 Watt Remote Capable Exit



DIMENSIONS

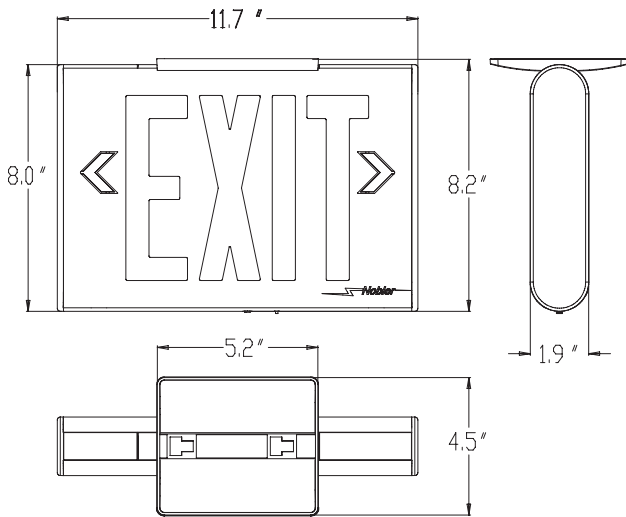

GENERAL DESCRIPTION

The powerhouse of exit signage features up to a total of 14 Watts of remote capability. The LG-150 eliminates the need for additional battery packs and maximizes the total amount of light you can put exactly where you want it. Perfect for exterior doorways where maximum illumination is required for areas of egress outside of the building.

HOUSING

UV Stable Thermo- plastic flame retardant meets UL standard 94V-0. Standard White, Black and Titanium finish (matches all products in same family) features quick and easy installation via snap in design. Unit installs in less than 5 minutes and is pre-wired at factory. Replaceable chevron directional indicator knockouts offer choice of direction on both stencils.

ILLUMINATION

Long lasting high output ALInGaP LED's with the highest performance and least degradation available in the market with a rated life of 10 years plus, illuminates the exit face.

ELECTRONICS AND BATTERY

Dual Voltage 120/277 VAC input facilitates the fully automatic Solid State charging system which features (LVD) Low Voltage Disconnect, AC lockout installation, brown out protection and AC indicator LED light standard. The maintenance free Special Sealed Lead Calcium battery provides a minimum of 90 minutes of illumination in emergency mode with an average life of 5 years. Optional Nickel Cadmium battery & 220V input also available.

CODE COMPLIANCE

Meets or exceeds UL 924, NFPA NEC and OSHA illumination standards.

WARRANTY

LIFETIME Limited warranty on housing and electronics
 5 year pro rated warranty on Sealed Led Acid battery.
 7 year pro rated warranty on Nicad battery

NOBLER SERIES™

LG-150

Model

Letter Color

R Red
 G Green

Housing Color

B Black
 W White
 Ti Titanium

Factory Installed Options

220 220 VAC Input
 NC Nicad Battery

