



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Durable die-cast aluminum exit sign
- Unit draws less than 3W
- Universal mounting: includes two stencils with back cover and canopy for field-conversion to double face

### CONSTRUCTION

- High-strength cast aluminum
- Hinged face plate and field selectable chevrons
- The face design features 6" letters with 3/4" stroke; 100ft viewing distance

### LAMP

- AllInGaP LEDs with a rated life of 10+ years

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

### BATTERY

- EM option comes standard with nickel-cadmium battery
- Provides a minimum of 90 minutes of illumination in emergency mode

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## DCA-U

DIE-CAST ALUMINUM LED EXIT SIGN



## DIMENSIONS

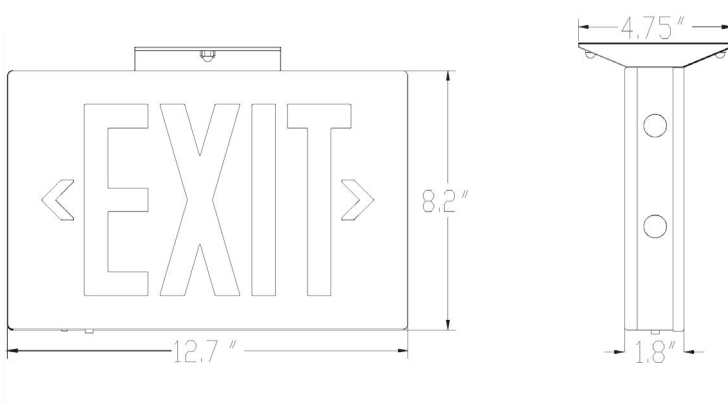

Material	Mounting	Battery	Code Compliance	Dimensions
Die-cast Aluminum	Wall / Ceiling / End	Nickel-cadmium	UL 924	12.7" W X 8.2" H X 4.75" D

## ORDERING GUIDE

MODEL	LETTER COLOR	HOUSING FINISH	STENCIL FINISH	BATTERY BACKUP	OPTIONS
DCA-U	R Red G Green	W White B Black BA Brushed Aluminum	BA Brushed Aluminum W White B Black	AC AC Only EM Emergency DI Two Transformer Input	SD Self Diagnostics 220 220 VAC Input