



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Die cast aluminum EXIT-EM combo unit
- Single face only; designed for wall mounting

CONSTRUCTION

- Extruded aluminum construction
- Field selectable chevron directional indicator offers a choice of direction on-site
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

LAMP

- Utilizes two high-efficiency 1W or 3W LED heads in emergency mode; higher wattage lamps are available upon request, consult factory for more options
- EXIT letters illuminated by long-lasting high-output AllnGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- Lead-acid battery is standard, nickel-cadmium battery offered as an option
- Provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 0 °C to 40 °C

COMPLIANCE

- Meets and or exceeds UL 924, NFPA, NEC, and OSHA illumination standards

WARRANTY


- 5 year warranty on housing and electronics. Battery is prorated

DCA-200-LED

DIE CAST ALUMINUM EXIT-EM COMBO



DIMENSIONS

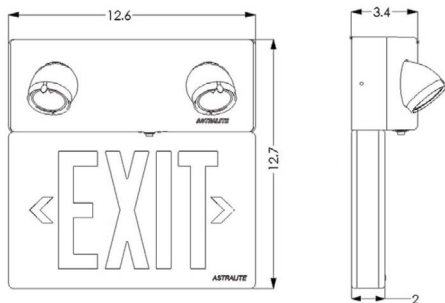

Material	Mounting	Battery	Code Compliance	Dimensions
Aluminum	Wall	Lead-acid	UL 924	12.6" W X 12.7" H X 3.4" D

ORDERING GUIDE

MODEL	LAMP OPTION	LETTER COLOR	HOUSING COLOR	OPTIONS
DCA-200-LED	2x1W Two 1W LEDs 2x3W Two 3W LEDs	R Red G Green	BA Brushed Aluminum W White B Black	SD Self Diagnostics NC Nickel Cadmium Battery