



|                |      |
|----------------|------|
| CATALOG NUMBER | TYPE |
| PROJECT NAME   | DATE |

## SPECIFICATIONS

### FEATURES

- PAR-36 L.E.D. gimbal emergency light with metal housing
- Suitable for air-handling plenums
- Application where path of egress and or general illumination to most shallow and standard plenum applications
- Part of Astralite's quick ship program

### CONSTRUCTION

- All metal housing with adjustable mounting bars
- Integrated backup battery and test switch

### LAMP

- Utilizes one 1W LED lamp with full adjustability
- Consult factory for additional lamp options

### ELECTRONICS

- Dual voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

### BATTERY

- Lead-acid battery is standard, and provides a minimum of 90 minutes of illumination in emergency mode
- Nickel-cadmium battery offered as an option
- Operating temperature range: 10-40° C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY



- 5-year warranty on housing and electronics. Battery is prorated

## GIM-36-LED

PAR36 GIMBAL EMERGENCY LIGHT



## DIMENSIONS

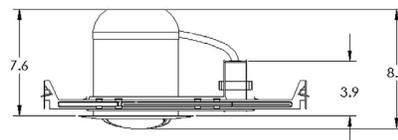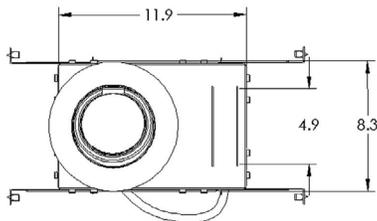

## ORDERING GUIDE

| MODEL      | LAMP <sup>1</sup>   | TRIM COLOR |
|------------|---------------------|------------|
| GIM-36-LED | LED 1 Watt LED Lamp | W White    |

### Notes:

1. Consult factory for other lamp options.