



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Semi-recessed emergency lighting with aluminum trim plate
- Designed for wall or ceiling mounting
- Features two fully adjustable L.E.D. heads
- Remote capable: choice of 14W or 28W unit capacity
- Fast, easy installation
- Part of Astralite's quick ship program

### CONSTRUCTION

- Aluminum trim plate with heavy-gauge galvanized steel back box
- UV-stable thermoplastic lamp housing

### LAMP

- Utilizes two 1W LED. lamps with fully-adjustable heads.

### ELECTRONICS

- Dual voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

### BATTERY

- Lead-acid battery is standard, and provides a minimum of 90 minutes of illumination in emergency mode
- Nickel-cadmium battery offered as an option
- Operating temperature range: 10-40° C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## LG-300-LED

SEMI-RECESSED EMERGENCY LIGHT



## DIMENSIONS

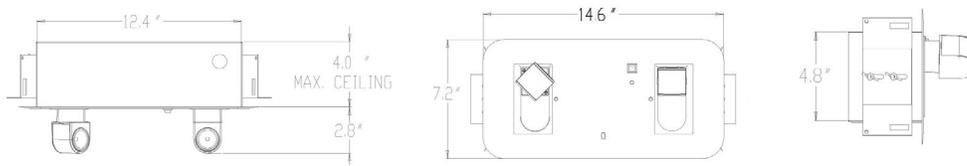

## ORDERING GUIDE

MODEL	INTEGRAL HEADS	HOUSING COLOR	OPTIONS
LG-300-LED	<b>2x1</b> 2x1W L.E.D. <b>2x3</b> 2x3W L.E.D.	<b>B</b> Black <b>W</b> White <b>Ti</b> Titanium	<b>220</b> 220 VAC Input <b>SD</b> Self Diagnostics <b>CAD-24</b> Caddy Bar <b>TD<sup>1</sup></b> Time Delay <b>REM</b> Remote Capability

### Notes:

1. Must specify input voltage and delay time