



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Edge-lit exit sign with extruded aluminum trim
- Slim-profile design complements upscale commercial or retail applications
- Can be ordered with special wording face panel
- Designed for wall, ceiling, or end surface mounting

### CONSTRUCTION

- Extruded aluminum housing and acrylic panel
- Available with 6", 8", or 10" EXIT letters
- Field-selectable chevron directional indicator offers a choice of direction on-site

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

### LAMP

- AlGalnP L.E.D. with a rated life of 10+ years

### BATTERY

- EM option comes standard with nickel-cadmium battery
- Provides a minimum of 90 minutes upon loss of power
- Operating temperature range: 10-40° C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## ELX-USM

SURFACE-MOUNTED L.E.D. EDGELIT SIGN



## DIMENSIONS

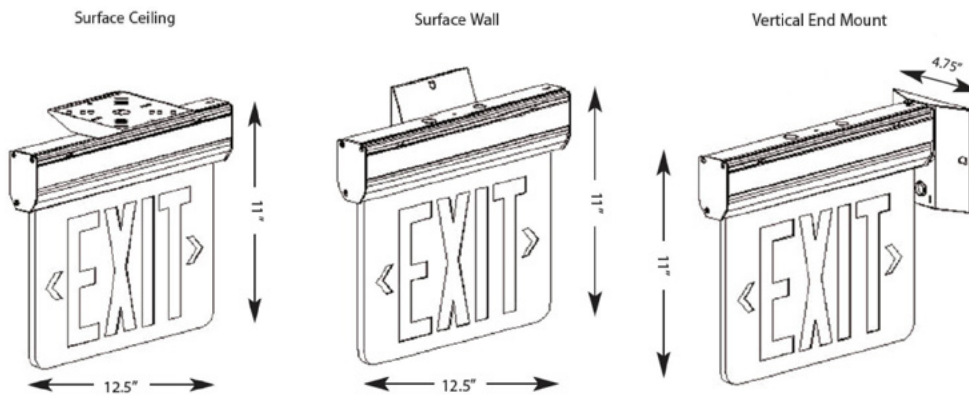

Material	Mounting	Battery	Code Compliance
Aluminum Housing / Acrylic Panel	Wall / Ceiling / End	Nickel-cadmium	UL 924

## ORDERING GUIDE

MODEL	LETTER HEIGHT	NO. OF FACES	LETTER/BACKGROUND	TRIM FINISH	POWER CONFIGURATION	OPTIONS
ELX-USM	6 6" Letters 8 8" Letters 10 10" Letters	1 Single 2 Double UNV Universal	RC <sup>1</sup> Red on Clear RW Red on White RM Red on Mirrored RB Red on Black GC <sup>1</sup> Green on Clear GW Green on White GM Green on Mirrored GB Green on Black	BA Brushed Aluminum WHT Powder Coated White BLK Powder Coated Black DB Dark Bronze BR Brass Finish	AC AC Only EM Battery Backup 2CKT Two Circuit Input	SD Self Diagnostics SW Special Wording PK <sup>2</sup> Pendant Kit REM Remote Capability 220 220 VAC 60Hz

### Notes:

1. Single face only
2. Ordered separately; see spec sheet for pendant kit (PK) for more information