



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Die cast aluminum EXIT-EM combination unit
- Designed for wall mounting only
- Remote capable: choice of 30W or 50W unit capacity

### CONSTRUCTION

- Durable die cast aluminum construction
- Features 2 fully-adjustable lamp heads
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

### LAMP

- Utilizes two 1W 6V LED heads in emergency mode
- EXIT illuminated by long-lasting high-output AllnGaP LEDs with a rated life of 10+ years

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout installation
- Brownout protection
- AC indicator LED light

### BATTERY

- Lead-calcium battery is standard, nickel-cadmium battery offered as an option
- Provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 0 °C to 40 °C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5 Years on housing and electronics. Battery is prorated

## DCA-500-LED

REMOTE CAPABLE DIE CAST ALUMINUM COMBO



## DIMENSIONS

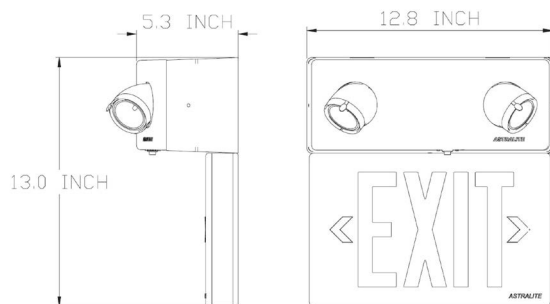

Material	Mounting	Battery	Code Compliance	Dimensions
Steel	Wall	Lead-calcium	UL 924	12.8" W X 13" H X 5.3" D

## ORDERING GUIDE

MODEL	LETTER HEIGHT	NO. OF FACES	LETTER/BACKGROUND	TRIM FINISH	POWER CONFIGURATION
DCA-500-LED	30	30 Watts	R Red	W White	SD Self Diagnostics
	50	50 Watts	G Green	B Black	220 220 VAC Input
				1 (2) 1W LED	NC Nickel-cadmium Battery
				3 (2) 3W LED	