



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Thermoplastic semi-recessed emergency light
- Designed for wall and ceiling mounting
- Remote capable: choice of 12W, 16W, 24W, or 36W unit capacity
- Fast, easy installation
- Part of Astralite's quick ship program

### CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating

### LAMP

- Utilizes two adjustable 1W LED heads in emergency mode
- Consult factory for additional lamp options

### ELECTRONICS

- Dual voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

### BATTERY

- Lead-acid battery is standard, and provides a minimum of 90 minutes of illumination in emergency mode
- Nickel-cadmium battery offered as an option
- Operating temperature range: 10-40° C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## TP-300-LED

SEMI-RECESSED THERMOPLASTIC EMERGENCY LIGHT



## DIMENSIONS

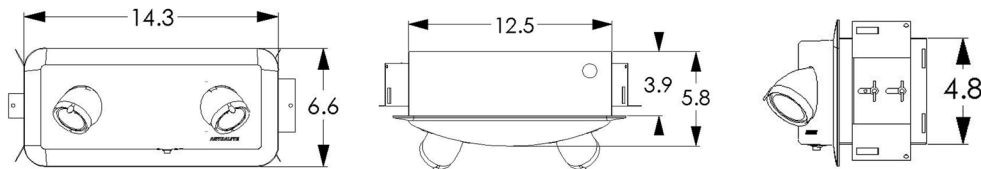

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Wall / Ceiling	Lead Calcium	UL 924	14.3" W X 6.6" H X 5.8" D

## ORDERING GUIDE

MODEL	INTEGRAL LAMPS	HOUSING COLOR	OPTIONS
TP-300-LED	<b>LED-2x1W</b> 2x1W LED Lamps No Remote <b>LED-2x3W</b> 2x3W LED Lamps No Remote	<b>W</b> White <b>B</b> Black <b>GL</b> Gold <b>SL</b> Silver <b>R</b> Red <b>G</b> Green <b>BLU</b> Blue <b>Y</b> Yellow	<b>220</b> 220 VAC Input <b>SD</b> Self Diagnostics <b>CAD-24</b> Caddy Bar <b>TD</b> Time Delay

Notes:  
1. Must specify input voltage and delay time.