



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Heavy-duty die cast aluminum emergency light
- Remote capable: choice of 30W or 50W unit capacity

### CONSTRUCTION

- Rugged die-cast aluminum construction
- Telescoping, fully rotatable heads


### LAMP

- Utilizes two 1W or 3W MR-16 LED heads in emergency mode; higher wattage lamps are available upon request, consult factory for more options

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout
- Brownout protection
- AC indicator light with test switch

### DIMENSIONS

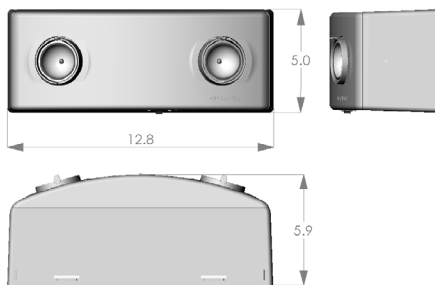

### BATTERY

- Lead-acid battery is standard, and provides a minimum of 90 minutes of illumination in emergency mode
- Nickel-cadmium battery offered as an option
- Operating temperature range: 10-40° C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY

- 5-year warranty on housing and electronics. Battery is prorated

## DCA-400-LED

HEAVY DUTY DIE CAST ALUMINUM EMERGENCY LIGHT



Material	Mounting	Battery	Code Compliance	Dimensions
Aluminum	Wall	Nickel-cadmium	UL 924	12.8" W X 5" H X 5.9" D

## ORDERING GUIDE

MODEL	TOTAL DC WATTAGE	INTEGRAL LAMPS	VOLTAGE	HOUSING FINISH	OPTIONS
DCA-400-LED	30 <sup>1</sup>	2x1 (2) 1W LED	6	BA <sup>2</sup> All Brushed Aluminum BA/B <sup>3</sup> Brushed Aluminum/Black W All White B All Black	SD Self Diagnostics TD Time Delay
	50 <sup>1</sup>	2x3 (2) 3W LED	12		

### Notes:

1. Capable Of 60 Watts
2. Standard
3. Front/Back