



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Contractor's choice EXIT-EM combo
- Sleek, compact design
- Designed for ceiling and wall installation
- Optional remote capability: choice of 3W or 10W at 6V
- Fast, easy installation
- Part of Astralite's quick ship program

### CONSTRUCTION

- UV-stabilized thermoplastic housing with a UL 94 V-0 rating
- Field-selectable universal snap-in directional indicators
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

### LAMP

- Utilizes (2) high-efficiency 1W LED emergency heads
- High-quality LEDs mounted on a printed circuit board provide uniform diffused illumination for 6" high letters with 3/4" stroke

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Brownout protection
- Low-voltage disconnect
- AC indicator light with test switch

### BATTERY

- Nickel-cadmium battery is standard
- Provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 10-40°C

### COMPLIANCE

- ETL listed. Meets UL 924, NFPA 101, NEC and OSHA illumination standards.

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## EEU-MR16-LED

THERMOPLASTIC LED COMBINATION UNIT



## DIMENSIONS

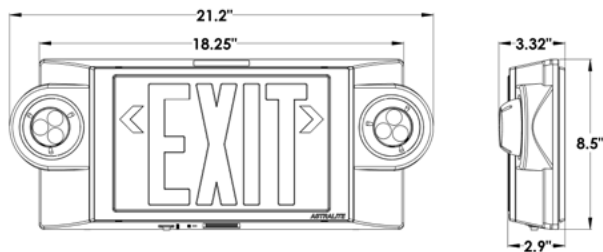

## ORDERING GUIDE

MODEL	LETTER COLOR	HOUSING COLOR	FACTORY INSTALLED OPTIONS
<b>EEU-MR16-LED</b> Thermoplastic LED Exit/EM Combination Unit	<b>G</b> Green <b>R</b> Red	<b>B</b> Black <b>W</b> White	<b>REM3</b> 3W 3.6V Remote Capable <b>REM10</b> 10W 6V Remote Capable <b>SD</b> Self Diagnostics Board