



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Thermoplastic emergency light with an intuitive snap-together design that allows for fast, easy installation
- Designed for wall or ceiling mounting
- Part of Astralite's quick ship program

CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating

LAMP

- Uses two 5W 6V T5 wedge-base lamps in emergency mode

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- Lead-acid battery is standard, and provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 10-40° C

COMPLIANCE


- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

EU-FL

THERMOPLASTIC EMERGENCY LIGHT

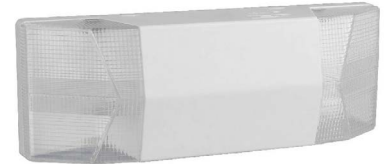

DIMENSIONS

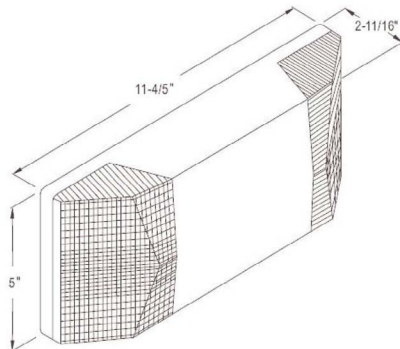

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Ceiling / Wall	Lead-calcium	UL 924	4.75" H x 12" W x 3.2" D

ORDERING GUIDE

MODEL

HOUSING FINISH

EU-FL
Thermoplastic Emergency Light

W White
B Black