



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Architectural grade edgelit exit sign with the International Symbol of Access (ISA)
- Designed for recessed ceiling and wall mounting

CONSTRUCTION

- Extruded aluminum trim with standard brushed finish
- Replaceable chevron directional indicator offers a choice of direction on-site
- Acrylic face panels feature 6" EXIT letters with 3/4" stroke and international symbol of access

LAMP

- AlGaIn LED with a rated life of 10+ years

ELECTRONICS

- Dual voltage input 120/277V 60Hz
- Test switch and LED AC indicator light
- Brownout protection

BATTERY

- EM option comes standard with nickel-cadmium battery, and provides a minimum of 90 minutes of illumination upon loss of power
- Operating Temperature Range: 0-40° C

COMPLIANCE

- Meets UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5 years on housing and electronics.
- Battery is pro-rated

ELX-HC-UNVRC

EDGE LIT SIGN WITH INTERNATIONAL SYMBOL OF ACCESS



DIMENSIONS

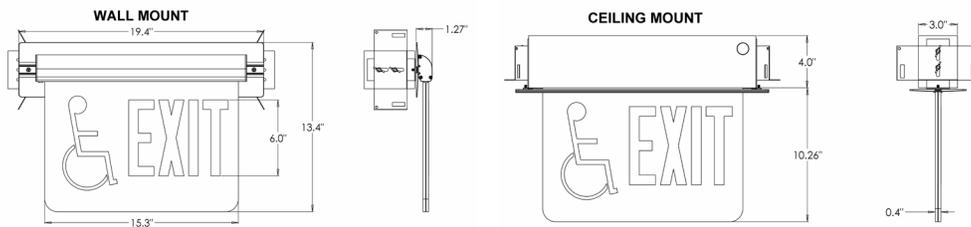

Material	Mounting	Battery	Code Compliance
Aluminum Trim / Acrylic Panel	Wall or Ceiling	Nickel-cadmium	UL924

ORDERING GUIDE

MODEL	MOUNTING	NO. OF FACES	LETTER/BACKGROUND	TRIM FINISH	POWER CONFIGURATION	OPTIONS
ELX-HC	UNVRC Universal Recessed	1 Single. 2 Double	RC ¹ Red on Clear RW Red on White RM Red on Mirrored	BA Brushed Aluminum WHT Powder Coated White BLK Powder Coated Black	AC AC Only EM Battery Backup 2CKT Two Circuit Input	SW Special Wording CAD-24 Caddy bars

Notes:
1. Single face only