



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Steel remote-capable surface/pendant mount emergency light
- Designed for surface mounting with optional pendant mounting
- Ideal for most indoor applications

CONSTRUCTION

- Rugged 20-gauge steel construction
- Caddy bars may be ordered for suspended ceiling applications
- Strut channel nuts and rods not supplied.

LAMP

- Utilizes two 8W halogen lamps with an aluminum reflector; LED lamping offered as an option, consult factory for more information

ELECTRONICS

- Dual voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- Lead-acid battery is standard, and provides a minimum of 90 minutes of illumination in emergency mode
- Nickel-cadmium battery offered as an option
- Operating temperature range: 10-40° C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

ASQ-S

REMOTE-CAPABLE SURFACE/PENDANT EMERGENCY UNIT



DIMENSIONS

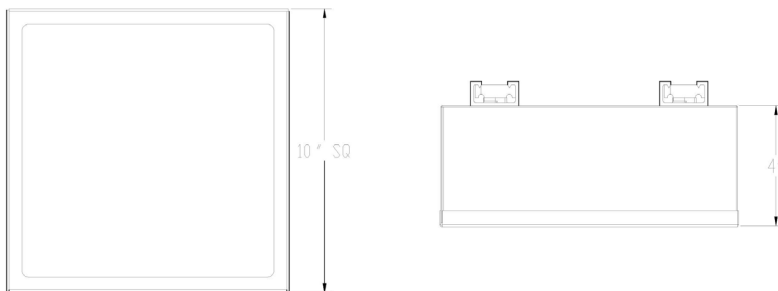

Material	Mounting	Code Compliance	Dimensions
Steel	Surface / Pendant	UL 924	10" W X 10" H X 4" D

ORDERING GUIDE

MODEL	HOUSING COLOR	TOTAL DC WATTAGE	DC VOLTAGE	OPTIONS
ASQ-S	B Black	16 16W	6 6V	220 220 VAC Input SD Self Diagnostics TD Time Delay PT Pendant two-strut channels mounted to top NC Nickel-cadmium battery
	W White	32¹ 32W	12¹ 12V	

Notes:

1. 32W only available at 12V
2. Must Specify AC Input Voltage and Delay Time