



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Thermoplastic emergency light with snap-together concept for fast installation
- Remote capability and polycarbonate shield offered as options
- Part of Astralite's quick ship program

### CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating

### LAMP

- Utilizes two high-efficiency 1W LED heads in emergency mode

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator LED light with test switch
- Brownout protection

### BATTERY

- Nickel-cadmium battery is standard and provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 10° C - 40° C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## EU-4-LED

### LED EMERGENCY LIGHT



## DIMENSIONS

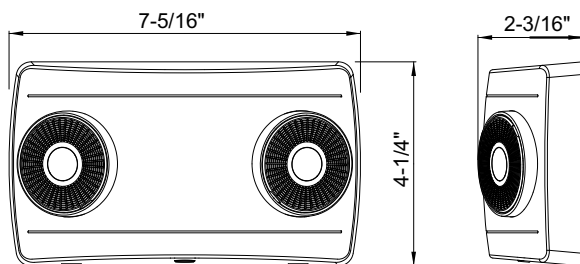

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Ceiling / Wall	Nickel-cadmium	UL 924	7.3" W X 4.25" H

## ORDERING GUIDE

MODEL	HOUSING FINISH	OPTIONS
<b>EU-4-LED</b> Thermoplastic L.E.D. Emergency Light	<b>B</b> Black <b>W</b> White	<b>REM</b> 2W 3.6V Remote Capability <b>PC1</b> Polycarbonate Shield <b>SD</b> Self Diagnostics