



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Extruded aluminum exit sign with CT symbol of access
- Designed for ceiling, end, and wall mounting; pendant mounting kit available as an option
- Features CT symbol of access

CONSTRUCTION

- Extruded aluminum construction
- Field-selectable chevron directional indicator offers a choice of direction on-site
- 6" EXIT letters with 3/4" stroke and CT symbol of access; 100ft viewing distance

LAMP

- AllnGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- Nickel-cadmium battery is standard
- Provides a minimum of 90 minutes of illumination in emergency mode

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

EANY-HC-CT

EXIT SIGN WITH SYMBOL OF ACCESS (CT APPROVED)



DIMENSIONS

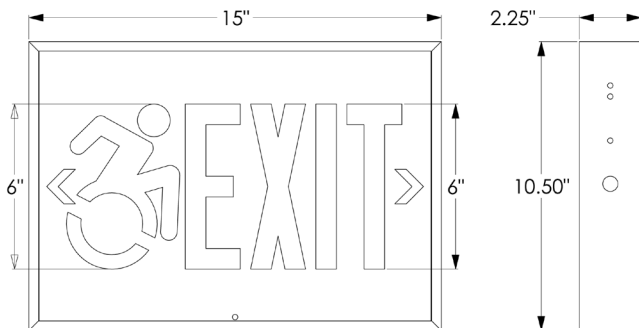

Material	Mounting	Battery	Code Compliance	Dimensions
Extruded Aluminum	Ceiling / End / Wall	Nickel-cadmium	UL 924	15" W X 10.5" H X 2.25" D

ORDERING GUIDE

MODEL	NUMBER OF FACES	LETTER COLOR	HOUSING COLOR	POWER CONFIGURATION
EANY-HC-CT Exit Sign With CT Symbol of Access	1 Single 2 Double	G Green R Red	W White B Black	AC AC Only EM Battery Backup