



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Contractor's choice thermoplastic EXIT-EM combo with remote capability
- Designed for wall mount only
- Remote capable: choice of 16W, 22W, or 25W unit capacity
- Fast, easy installation
- Part of Astralite's quick ship program

CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

LAMP

- Utilizes two adjustable 1W LED heads in emergency mode
- Exit face illuminated by long-lasting high-output AllnGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout installation
- Brownout protection
- AC indicator light with test switch

BATTERY

- Lead-acid battery is standard, and provides a minimum of 90 minutes of illumination in emergency mode
- Nickel-cadmium battery offered as an option
- Operating temperature range: 10-40° C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

TP-200-PLUS-LED

REMOTE CAPABLE COMBINATION UNIT



DIMENSIONS

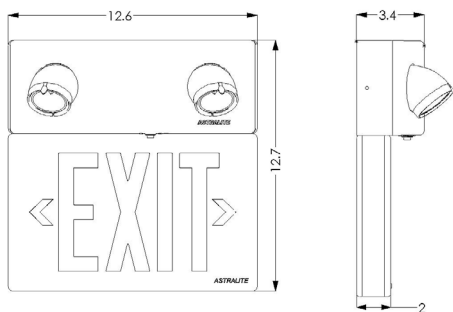

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Wall	Nickel-cadmium	UL 924	12.6" W X 12.7" H X 3.4" D

ORDERING GUIDE

MODEL	TOTAL WATTAGE	LETTER COLOR	HOUSING COLOR	INTEGRAL LAMPS	OPTIONS
TP-200-PLUS-LED	16	16W	G Green R Red	W White B Black	2x1 2 x 1W L.E.D. 2x3 2 x 3W L.E.D.
	22	22W			
	25	25W			
					220 220 VAC Input SD Self Diagnostics