



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- AC only thermoplastic edgelit exit sign
- Slim, low-profile design
- Fast, easy installation
- Unit draws less than 2W
- Part of Astralite's quick ship program

CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Fixture arrives ready to install in minutes
- Field-selectable chevron directional indicator offers a choice of direction on-site

LAMP

- AllInGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

EL

AC ONLY LOW-PROFILE LED EDGELIT EXIT



DIMENSIONS

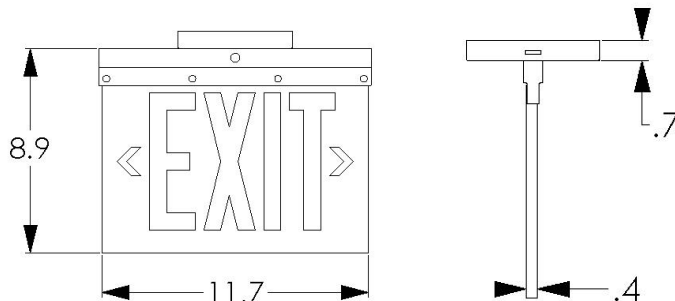

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Ceiling / Wall / End	Nickel-cadmium	UL 924	11.7" W X 8.9" H

ORDERING GUIDE

MODEL	LETTER COLOR	NO. OF FACES	MOUNTING	TRIM/PANEL
EL AC Only Low-Profile LED Edgelit Exit	R Red	1 Single 2 Double	B ¹ Back Mount E End Mount C Ceiling Mount	W White/White B Black/Black WC ¹ White/Clear BC ¹ Black/Clear

Notes:

1. Single face only