



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Contractor's choice EXIT-EM combo
- Available with remote capability (see EEU-2-16-LED)
- Designed for ceiling or wall mounting
- Fast, easy installation
- Part of Astralite's quick ship program

### CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Features quick and easy installation with snap in design
- Replaceable chevron directional indicators offer a choice of direction on both stencils
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

### LAMP

- Utilizes two high-efficiency 1W LED heads in emergency mode; higher wattage lamps are available upon request, consult factory for more options
- Long-lasting high-output AllnGaP LEDs with a rated life of 10+ years illuminate the exit face

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout installation
- Brownout protection
- AC indicator LED light with push to test button

### BATTERY

- Nickel-cadmium battery comes standard
- Provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 10-40° C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5 year warranty on housing and electronics. Battery is prorated

## EEU-2-LED

LED EXIT/EMERGENCY LIGHT COMBINATION UNIT



## DIMENSIONS

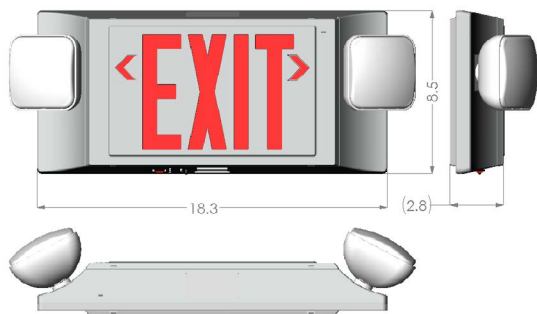

## ORDERING GUIDE

MODEL	LETTER COLOR	HOUSING COLOR	OPTIONS
<b>EEU-2-LED</b> LED Exit/Emergency Light Combination Unit	<b>G</b> Green <b>R</b> Red	<b>B</b> Black <b>W</b> White	<b>220</b> 220 VAC Input <b>SD</b> Self Diagnostics <b>SW</b> Special Wording