



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Steel remote capable emergency light designed for use in New York City
- Remote capable: choice of 30W or 50W unit capacity

### CONSTRUCTION

- 20-gauge steel construction
- Available with two, three, or no lamp heads
- Offers universal mounting plate and knockouts

### LAMP

- Utilizes two 10W bi-pin halogen lamp heads in emergency mode

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout installation
- AC indicator light with test switch
- Brownout protection

### BATTERY

- Lead-calcium battery is standard and provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 0 °C to 40 °C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards
- NYC approved

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## EUNY

DURABLE STEEL EMERGENCY LIGHT



## DIMENSIONS

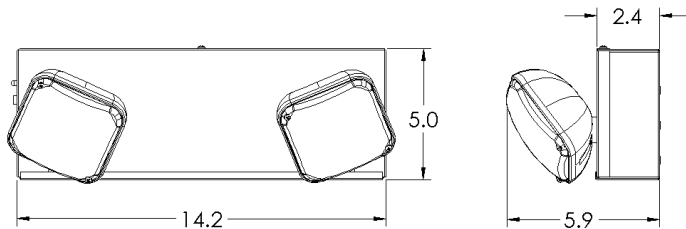

Material	Battery	Code Compliance	Dimensions
Steel	Nickel-cadmium	UL 924	14.2" W X 5" H X 5.9" D

## ORDERING GUIDE

MODEL	TOTAL DC WATTAGE	NO. OF INTEGRAL HEADS	DC VOLTAGE	HOUSING COLOR	OPTIONS
EUNY	30W 30W	NH No Heads	6 6V DC	W White	SD Self Diagnostics
	50W 50W	2 Two Heads	12 12V DC	B Black	NC Nickel-cadmium Battery
		3 Three Heads			TD <sup>1</sup> Time Delay

### Notes:

1. Must specify AC input voltage and delay time.