



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Thermoplastic EXIT-EM combination unit with krypton lamps
- Universal mounting canopy for top installation
- Optional remote capability: 10W at 6V
- Fast, easy installation
- Part of Astralite's quick ship program

CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Features universal snap in and out chevrons
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

LAMP

- Uses two 6W krypton lamp heads with full adjustability in emergency mode
- Includes down light
- Long-lasting high-output AllnGaP LEDs illuminate the EXIT face

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Brownout protection
- Low-voltage disconnect
- AC indicator light with test switch

BATTERY

- Lead acid battery is standard
- Provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 10-40° C

COMPLIANCE


- ETL listed. Meets UL 924, NFPA 101, NEC and OSHA illumination standards.

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

EEU-Q

THERMOPLASTIC EXIT-EM COMBO

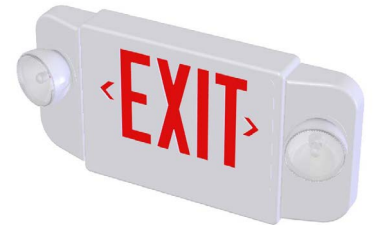

DIMENSIONS

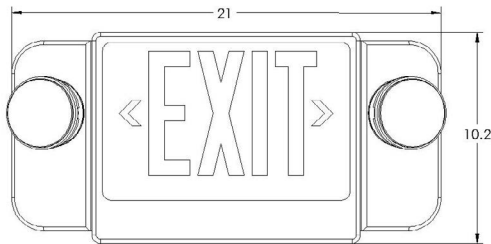

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Wall / Ceiling / End	Lead Calcium	UL 924	21" W X 10.2" H X 2.6" D

ORDERING GUIDE

MODEL	LETTER COLOR	HOUSING COLOR	OPTIONS
EEU-Q	G Green R Red	B Black W White	REM 10W 6V Remote Capability