



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Rugged steel recessed emergency light
- Designed for recessed ceiling mounting
- Ideal for areas where sealed beam directional lighting is not required

### CONSTRUCTION

- Rugged steel construction with a photometrically-optimized reflector system shielded by a UV-stabilized 0.125" thick prismatic lens
- Available in custom colors and finishes; consult factory for options
- Optional mounting bars (CAD-24) available for fast installation in suspended ceilings

### LAMP

- Utilizes two 1W 4.8V LED lamps
- Features a precision-formed alzak reflector system for broad, evenly distributed lighting

### ELECTRONICS

- Dual voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

### BATTERY

- Lead-acid battery is standard, and provides a minimum of 90 minutes of illumination in emergency mode
- Nickel-cadmium battery offered as an option
- Operating temperature range: 10-40° C

### COMPLIANCE


- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY



- 5-year warranty on housing and electronics. Battery is prorated

## ASQ-R-LED

RECESSED EMERGENCY LIGHTING UNIT

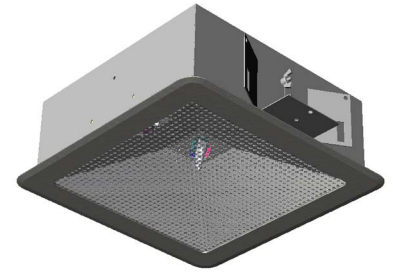

## DIMENSIONS



Material	Mounting	Battery	Code Compliance	Dimensions
Steel	Ceiling	Nickel Cadmium	UL 924	13" W X 13" H X 4" D

## ORDERING GUIDE

MODEL	HOUSING COLOR	LAMPING	DC VOLTAGE	OPTIONS
<b>ASQ-R-LED</b> Recessed Ceiling Emergency Light	<b>B</b> Black <b>W</b> White	<b>2x1</b> 2x1W L.E.D. Heads	<b>4.8</b> 4.8 VDC	<b>220</b> 220 VAC Input <b>SD</b> Self Diagnostics <b>CAD-24</b> Caddy-bars <b>REM</b> Remote Capable <b>DL</b> Damp Location <b>BH<sup>1</sup></b> Battery Heater <b>TD<sup>2</sup></b> Time Delay <b>NC</b> Nickel-cadmium battery

### Notes:

1. Standard with Self Diagnostic
2. Must Specify AC input Voltage and Delay Time