



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Die-cast aluminum semi-recessed emergency light
- Designed for ceiling mounting
- Features a semi-recessed design

CONSTRUCTION

- Die-cast aluminum construction with a heavy-gauge galvanized steel back box
- Features two fully-adjustable telescoping heads

LAMP

- Utilizes two adjustable 1W LED heads in emergency mode; consult factory for additional lamp options

ELECTRONICS

- Dual voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- Lead-acid battery is standard, and provides a minimum of 90 minutes of illumination in emergency mode
- Nickel-cadmium battery offered as an option
- Operating temperature range: 10-40° C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

DCA-300-LED

SEMI-RECESSED ALUMINUM EMERGENCY LIGHT



DIMENSIONS

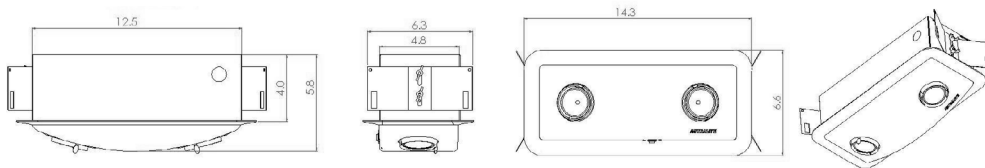

Material	Mounting	Battery	Code Compliance	Dimensions
Metal	Ceiling	Lead Calcium	UL 924	14.3" H X 6.6" H X 5.8" D

ORDERING GUIDE

MODEL	LAMPING	HOUSING / TRIM FINISH	OPTIONS
DCA-300-LED	2x1 2x1W LED Heads	BA Brushed Aluminum/Black Trim W White Housing/White Trim B Black Housing/Black Trim	220 220 VAC Input SD Self Diagnostics CAD-24 Caddy Bar NC Nickel-Cadmium Battery REM Remote Capability
	2x3 2x3W LED Heads		