



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Thermoplastic EXIT-EM combo with NEMA 3R enclosure
- Wall mount only
- Part of Astralite's quick ship program

CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Polycarbonate shield provides a degree of protection against falling rain and sleet
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

LAMP

- Utilizes two 5W 6V halogen heads in emergency mode; higher wattage lamps are available upon request, consult factory for more options
- Face is illuminated by long-lasting high-output AlInGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout installation
- Brownout protection
- AC indicator LED with test switch

BATTERY

- Lead-calcium battery comes standard and provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 10-40° C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards
- Wet location listed

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

EEU-3-3R-W

NEMA 3R WALL MOUNT COMBINATION EXIT



DIMENSIONS

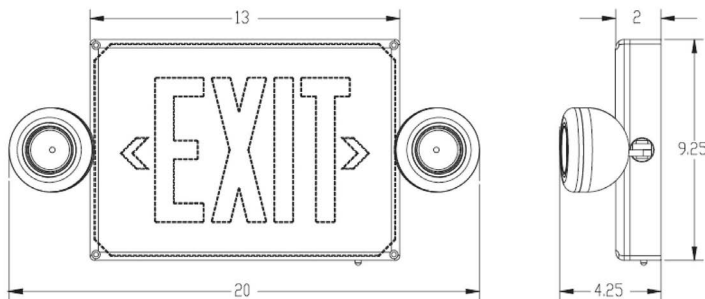

Material	Mounting	Battery	Code Compliance	Dimensions
Polycarbonate shield	Wall	Lead-calcium	UL 924	20" W X 9.25" H X 4.25" D

ORDERING GUIDE

MODEL	MOUNTING	LETTER COLOR	HOUSING COLOR
EEU-3-3R	W Wall Mount Only	R Red G Green	G Gray