

CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Remote capable extruded aluminum exit sign
- · Designed for ceiling or wall mounting
- Remote capable: 2W at 6V

CONSTRUCTION

- Extruded aluminum body with acrylic panel
- Choose from five finishes: brushed aluminum, white, black, dark bronze, or brass; consult factory for custom finishes
- Field-selectable chevron directional indicator offers a choice of direction on-site

LAMP

• AllnGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- · AC indicator light with test switch
- Brownout protection

BATTERY

- · Nickel-cadmium battery comes standard
- Provides a minimum of 90 minutes of illumination upon loss of power

COMPLIANCE

• Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY

5-year warranty on housing and electronics. Battery is prorated

LG-750-REM

REMOTE CAPABLE EXTRUDED ALUMINUM EXIT



DIMENSIONS






Dimensions Shown: LG-750-REM-6

Material	Mounting	Battery	Code Compliance	Dimensions
Aluminum Housing	Ceiling / Wall	Nickel-cadmium	UL 924	11.8" W X 11.66" H X 4.75" D

ORDERING GUIDE

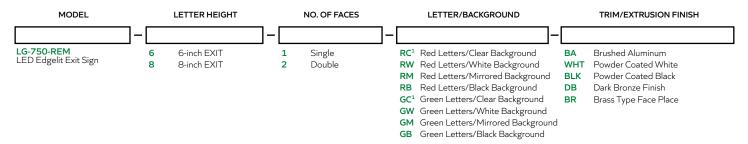

Notes:

1. Single face only