



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Steel emergency light for industrial applications
- Features two, three, or no heads

CONSTRUCTION

- Rugged 20-gauge steel construction
- Universal mounting plate and knockouts for easy installation

LAMP

- Choice of no heads, two heads, or three heads
- Consult factory for lamp options

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout
- Brownout protection
- AC indicator light with test switch

BATTERY

- Lead-calcium battery is standard and provides a minimum of 90 minutes of illumination in emergency mode; Nickel-cadmium battery offered as an option
- Operating temperature range: 10 °C to 40 °C
- Provides a minimum of 90 minutes of illumination in emergency mode

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

NY-NA/2A/3A

STEEL EMERGENCY LIGHT WITH CHOICE OF HEADS



DIMENSIONS

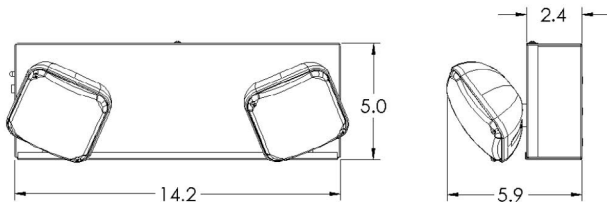

Material	Battery	Code Compliance	Dimensions
Steel	Nickel-cadmium	UL 924	14.2" W X 5" H X 5.9" D

ORDERING GUIDE

MODEL	NUMBER OF HEADS	HOUSING COLOR	OPTIONS
NY	2A Two Heads 3A Three Heads NA No Head	B Black W White	SD Self Diagnostics TD¹ Time Delay

Notes:

1. Must specify AC input voltage and delay time