



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Thermoplastic emergency light
- Designed to provide high levels of glare-free illumination
- Designed for wall mounting
- Remote capable: 16W, 22W, or 25W
- Fast, easy installation
- Part of Astralite's quick ship program

### CONSTRUCTION

- UV stable thermoplastic construction
- Features two adjustable heads

### LAMP

- Utilizes two 1W LED heads in emergency mode; higher wattage lamps are available upon request, consult factory for more options

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout
- Brownout protection
- AC indicator light with test switch

### BATTERY

- Lead-calcium battery is standard and provides a minimum of 90 minutes of illumination in emergency mode; Nickel-cadmium battery offered as an option
- Operating temperature range: 10-40° C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## TP-100-PLUS-LED

### THERMOPLASTIC EMERGENCY LIGHT



## DIMENSIONS

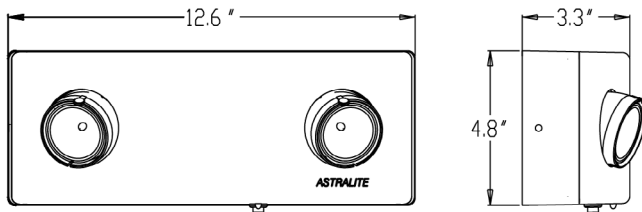

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Wall	Nickel-cadmium	UL 924	12.6" W X 4.7" H X 3.3" D

## ORDERING GUIDE

MODEL	TOTAL DC WATTAGE	INTEGRAL LAMPS	HOUSING FINISH	OPTIONS
<b>TP-100-LED</b> Thermoplastic Emergency Light	<b>16W</b> 16 Watts	<b>2x1</b> 2 x 1 Watt LED	<b>B</b> Black	<b>220</b> 220 VAC Input
	<b>22W</b> 22 Watts	<b>2x3</b> 2 x 3 Watt LED	<b>W</b> White	<b>A<sup>1</sup></b> Ammeter
	<b>25W</b> 25 Watts			<b>CP</b> Canopy
				<b>NC</b> Nickel-cadmium Battery
				<b>SD</b> Self Diagnostics
				<b>TD<sup>2</sup></b> Time Delay
				<b>V<sup>1</sup></b> Voltmeter

### Notes:

1. Select One
2. Must Specify AC Input Voltage and Delay Time