



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Commercial series steel exit sign
- Designed for ceiling, wall, or end mounting
- Universal mounting; ships with canopy kit and extra face panel for field-conversion to double face

CONSTRUCTION

- Durable heavy-gauge steel construction
- Knockout directional indicators
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance
- Custom colors are available; contact factory for more information

LAMP

- AllnGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- EM option comes standard with nickel-cadmium battery
- Provides a minimum of 90 minutes of illumination upon loss of power

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

ST

6 INCH STEEL LED EXIT SIGN



DIMENSIONS

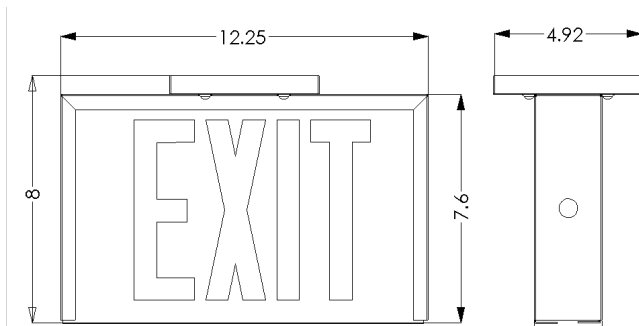

Material	Mounting	Battery	Code Compliance	Dimensions
Steel	Wall / Ceiling / End	Nickel-cadmium	UL 924	12.25" W X 7.6" H X 4.92" D

ORDERING GUIDE

MODEL	MOUNTING	LETTER COLOR	HOUSING COLOR	POWER CONFIGURATION	OPTIONS
ST Steel LED Exit Sign	1 Single Face Wall Mount 1C Single Face With Canopy U Universal	R Red G Green	W White B Black	AC AC Only EM Battery Backup	PK ¹ Pendant Kit DI Dual Input Transformer SW Special Wording 220 220 VAC Input

Notes:

1. ST-U models only, order separately; see pendant kit specification sheet for more information