



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Vandal-resistant thermoplastic exit sign with polycarbonate shield and optional waterproof gasket
- Choice of ceiling, wall, or end mounting
- Part of Astralite's quick ship program

CONSTRUCTION

- UV stabilized thick polycarbonate shield
- Mounts quickly using a .100" thick stainless steel wall plate
- **VRS** option includes tamperproof mounting screws
- **4x** option includes neoprene gaskets suitable for hose-down applications
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

LAMP

- AllnGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- EM option comes standard with nickel-cadmium battery
- Provides a minimum of 90 minutes of illumination upon loss of power
- Operating temperature range: 10-40° C

COMPLIANCE


- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY

- 5-year warranty on housing and electronics. Battery is prorated

TP-VRS/4X

VANDAL RESISTANT/WATERPROOF EXIT

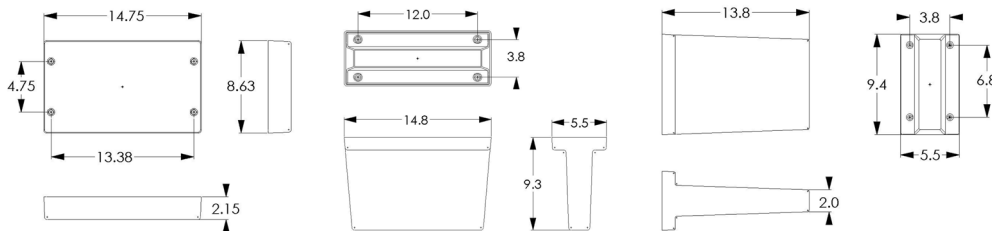

Material	Mounting	Battery	Code Compliance
Thermoplastic	Wall / Ceiling / End	Nickel-cadmium	UL 924

ORDERING GUIDE

MODEL	MOUNTING	TYPE	LETTER COLOR	HOUSING COLOR	POWER CONFIGURATION	OPTIONS
TP	C Ceiling E End W Wall	VRS Vandal Resistant 4X Waterproof	R Red G Green	W White B Black	AC AC Only EM Battery Backup DI Two Transformer Input	FL ¹ Flasher Only FA ² Fire Alarm Panel Interface FLA ³ FL Option With Audible Alarm FAA ⁴ FA Option With Audible Alarm TPS ⁵ Tamperproof Screws TPSD Tamperproof Screwdriver 220 220 VAC Input

Notes:

1. Battery Units Only. Flashes when unit hoes into emergency condition.
2. AC and Battery Units. Flashes in both modes when signal from fire alarm panel is received (6-24VDC).
3. FL option with audible alarm.
4. FA Option with audible alarm.
5. Standard for VRS.