



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Thermoplastic emergency light
- Designed for wall mounting
- Sleek modern profiled design
- Fast, easy installation
- Part of Astralite's quick ship program

CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating

LAMP

- Utilizes two 1W LED lamps

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout installation
- Brownout protection

BATTERY

- Nickel-cadmium battery is standard
- Provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 10-40° C


COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY

- 5-year warranty on housing and electronics. Battery is prorated

DIMENSIONS

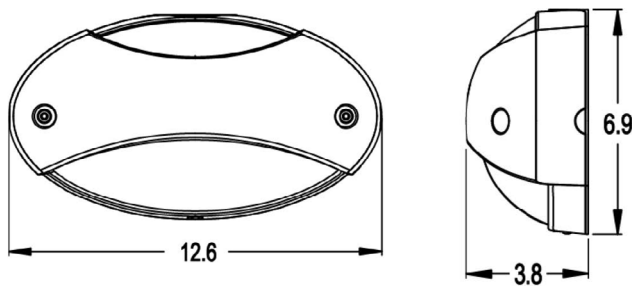

TP-AP-LED

INDOOR THERMOPLASTIC EMERGENCY UNIT



Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic ¹	Wall	Nickel-cadmium	UL 924	12.6" W X 3.8" D X 6.9" H

ORDERING GUIDE

MODEL	HOUSING FINISH	OPTIONS
TP-AP-LED Indoor Thermoplastic Emergency Unit	BK Black WH White	SD Self Diagnostics / Self Testing

Notes:

1. Also available in Die-Cast option.