



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Contractor's choice thermoplastic EXIT-EM combo with two side-mounted, adjustable heads
- Designed for ceiling and wall mounting
- Fast, easy installation
- Part of Astralite's quick ship program

CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

LAMP

- Utilizes two 1W LED lamps in emergency mode
- EXIT face is illuminated by long-lasting high-output AllnGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout installation
- Brownout protection
- AC indicator light with test switch

BATTERY

- Nickel-cadmium battery comes standard
- Provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 10-40° C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

LG-200-LED

CONTRACTOR'S CHOICE EXIT-EM COMBINATION UNIT



DIMENSIONS

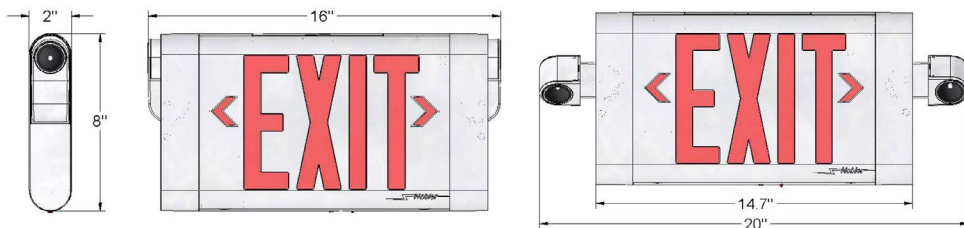

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Wall / Ceiling	Nickel-cadmium	UL 924	20" W x 8.2" H

ORDERING GUIDE

MODEL	LETTER COLOR	HOUSING COLOR	OPTIONS
LG-200-LED	G Green	B Black	PK¹ Pendant Kit
	R Red	W White	220 220 VAC Input
		Ti Titanium	SD Self Diagnostics
			REM Remote Capability

Notes:

1. Order separately; refer to the pendant kit (PK) specification sheet for more information