



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Die-cast aluminum emergency light
- Designed for wall mounting
- Features emergency backup option

CONSTRUCTION

- Die-cast aluminum construction
- Powder-coated finish provides style and durability for any application
- UV resistant polycarbonate lens

LAMP

- Utilizes a 17W high efficiency LED in emergency mode; Unit can also be used in AC mode
- Color Temperature: 5000K
- Total lumen output in AC mode is 1600 lm, or 600 lm in emergency mode.

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brown out protection
- Optional Self diagnosis and PIR sensor available

BATTERY

- Nickel-cadmium battery comes standard
- Operating temperature range: 0 °C to 40 °C
- Provides a minimum of 90 minutes of illumination in emergency mode

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

WP-AP

HEAVY DUTY INDOOR/OUTDOOR LED FIXTURE



DIMENSIONS

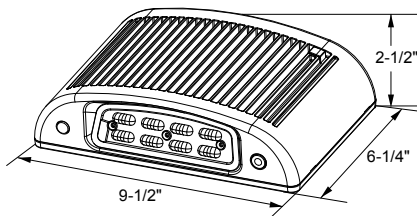

Material	Mounting	Battery	Code Compliance
Die-cast Aluminum	Wall	Nickel-cadmium	UL 924

ORDERING GUIDE

MODEL	HOUSING FINISH	OPTIONS
WP-AP Indoor/Outdoor LED Fixture	DB Dark Bronze SL Silver	C Cold Weather (-25°C - 50°C) PIR PIR Sensor SD Self Diagnostics