



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Remote capable thermoplastic exit sign
- Designed for wall, ceiling, or end mounting
- Remote capability: 14W at 6V
- Snap-in design for fast, easy installation
- Part of Astralite's quick ship program

CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Features quick and easy installation via snap in design
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance
- Replaceable chevron directional indicator knockouts

LAMP

- AllnGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- Nickel-cadmium battery comes standard
- Provides a minimum of 90 minutes of illumination upon loss of power

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

LG-150

14 WATT REMOTE CAPABLE EXIT



DIMENSIONS

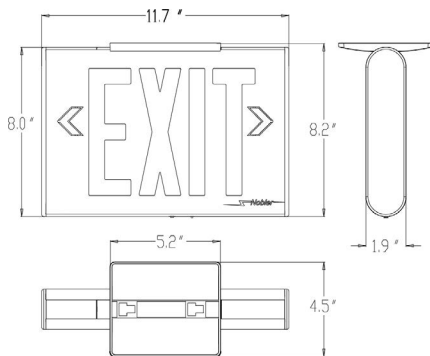

Material	Battery	Code Compliance	Dimensions
Thermoplastic	Nickel-cadmium	UL 924	12.6" W x 8.2" H x 4.5" D

ORDERING GUIDE

MODEL	LETTER COLOR	HOUSING COLOR	OPTIONS
LG-150 14 Watt Remote Capable Exit	G Green R Red	B Black W White Ti Titanium	PK ¹ Pendant Kit 220 220 VAC Input

Notes:

1. Ordered separately; see spec sheet for pendant kit (PK) for more information