



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Steel combo with the International Symbol of Access (ISA)
- Features two fully-adjustable heads
- Part of Astralite's quick ship program

CONSTRUCTION

- 20-gauge steel construction
- Field-selectable knock-out chevron directional indicators
- Face design features 6" EXIT letters with 3/4" stroke, and International Symbol of Access; 100ft viewing distance

LAMP

- Utilizes two 1W LED lamps in emergency mode
- EXIT face is illuminated by long-lasting high-output AlInGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Brownout protection
- Low-voltage disconnect
- AC indicator light with test switch

BATTERY

- Nickel-cadmium battery comes standard
- Provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 0 °C to 40 °C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

LG-8ST-200-LED-HC

STEEL EXIT-EM COMBO WITH ISA



DIMENSIONS

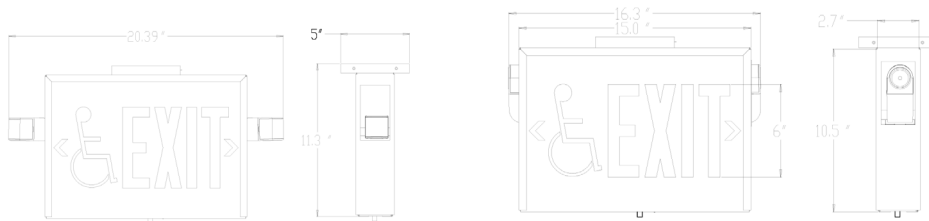

Material	Mounting	Battery	Code Compliance	Dimensions
Steel	Wall / Ceiling	Nickel-cadmium	UL 924	20.39" H x 10.5" H x 5" D

ORDERING GUIDE

MODEL	NUMBER OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
LG-8ST-200-LED-HC	1 Single 2 Double	R Red	B Black W White SP ¹ Special	220 220 VAC Input

Notes:

1. Contact Factory for custom finishes.