



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Exit sign with NEMA 3R enclosure
- Wall mount only
- Fast, easy installation
- Part of Astralite's quick ship program

### CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Polycarbonate shield provides a degree of protection against falling rain and sleet
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

### LAMP

- AllnGaP LEDs with a rated life of 10+ years

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

### BATTERY

- EM option comes standard with nickel-cadmium battery, and provides a minimum of 90 minutes of illumination upon loss of power
- Operating temperature range: 10-40° C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## TP-FD-3R-W

NEMA 3R WALL MOUNT EXIT



## DIMENSIONS

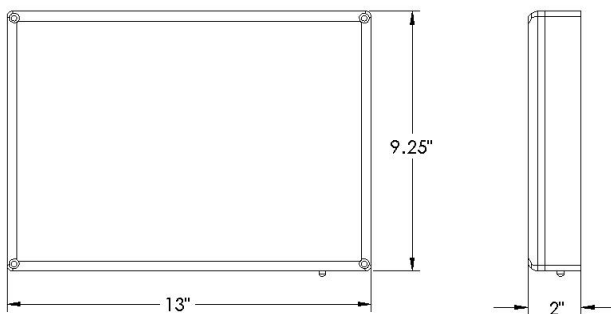

Material	Mounting	Battery	Code Compliance	Dimensions
Polycarbonate Shield	Wall	Nickel-cadmium	UL 924	13" W X 9.25" H

## ORDERING GUIDE

MODEL	MOUNTING	LETTER COLOR	HOUSING COLOR	POWER CONFIGURATION
TP-FD-3R	W Wall Mount Only	R Red G Green	G Gray	AC AC Only EM Emergency