



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Contractor's choice thermoplastic exit sign
- Universal mounting; ships with canopy kit and extra face panel for field-conversion to double face
- Fast, easy installation
- Optional special wording face panels
- Part of Astralite's quick ship program

### CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Knockout directional indicators
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

### LAMP

- AllnGaP LEDs with a rated life of 10+ years

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

### BATTERY

- EM option comes standard with nickel-cadmium battery, and provides a minimum of 90 minutes of illumination upon loss of power
- Operating temperature range: 10-40° C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## TP-U

CONTRACTOR'S CHOICE THERMOPLASTIC EXIT



## DIMENSIONS

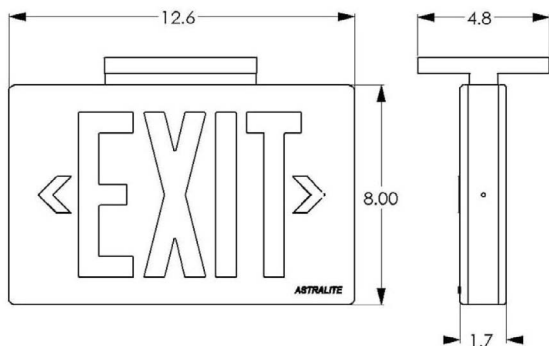

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Wall / Ceiling / End	Nickel-cadmium	UL 924	12.6" W X 8" H X 4.8" D

## ORDERING GUIDE

MODEL	MOUNTING	LETTER COLOR	HOUSING COLOR	POWER CONFIGURATION	OPTIONS
TP Thermoplastic Exit Sign	U Universal	R Red G Green	GL Gold Metalized W White B Black SL Silver Metalized R Red G Green BLU Blue Y Yellow	AC AC Only EM Battery Backup DI Two Transformer Input DC <sup>1</sup> Remote DC Input	FL <sup>2</sup> Flasher Only FA <sup>3</sup> Fire Alarm Interface FLA <sup>4</sup> FL With Audible Alarm FAA <sup>5</sup> FA With Audible Alarm SW Special Wording SD Self Diagnostics PK <sup>6</sup> Pendant Kit

### Notes:

1. 6 to 24 VDC. Must specify input voltage.
2. Flashes only when unit goes into emergency condition. Battery units only.
3. Flashes in both modes when signal is received (6 to 24 VDC).
4. FL option with Audible Alarm. Battery units only.
5. FA option with Audible Alarm.
6. Order separately; refer to the pendant kit (PK) specification sheet for more information