



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Thermoplastic emergency light
- Designed to provide high levels of glare free illumination
- Designed for wall mounting
- Fast, easy installation
- Part of Astralite's quick ship program

CONSTRUCTION

- UV stable thermoplastic construction
- Features two fully adjustable heads

LAMP

- Utilizes two 1W LED heads in emergency mode; higher wattage lamps are available upon request, consult factory for more options

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout
- Brownout protection
- AC indicator light with test switch

BATTERY

- Nickel-cadmium battery comes standard
- Operating temperature range: 10-40° C
- Provides a minimum of 90 minutes of illumination in emergency mode

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards


WARRANTY

- 5-year warranty on housing and electronics. Battery is prorated

TP-100-LED THERMOPLASTIC EMERGENCY LIGHT



DIMENSIONS

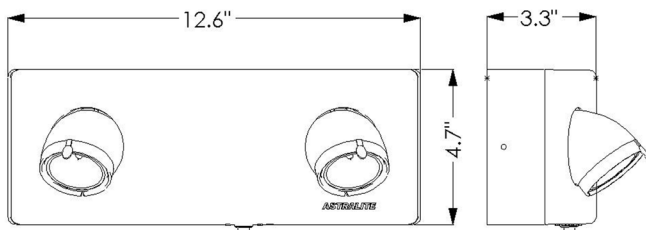

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Wall	Nickel-cadmium	UL 924	12.6" W X 4.7" H X 3.3" D

ORDERING GUIDE

MODEL	LAMP WATTAGE	HOUSING FINISH	OPTIONS
TP-100-LED Thermoplastic Emergency Light	2x1 Two 1W LED Heads 2x3 Two 3W LED Heads	B Black W White	220 220 VAC Input A¹ Ammeter CP Canopy NC Nickel-cadmium Battery SD Self Diagnostics TD Time Delay V¹ Voltmeter

Notes:
1. Select one