



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Universal mounting; ships with canopy kit and extra face panel for field-conversion to double face
- Fast, easy installation
- Part of Astralite's quick ship program

CONSTRUCTION

- UV-stabilized thermoplastic housing with a UL 94 V-0 rating
- Field-selectable universal snap-in directional indicators

LAMP

- High-quality LEDs provide uniform diffused illumination

ELECTRONICS

- Dual voltage input 120/277V 60Hz
- Test switch and L.E.D. indicator light

BATTERY

- Nickel-Cadmium battery is standard and provides a minimum of 90 minutes of illumination in emergency mode
- Operating Temperature Range: 0-40° C


COMPLIANCE

- Meets UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY

- 3 years on housing and electronics

DIMENSIONS

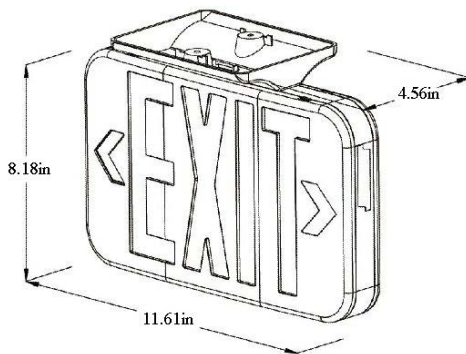

TP-CH

LED THERMOPLASTIC EXIT SIGN



Material	Mounting	Wattage	Battery	Operating Temperature
Thermoplastic	Universal	4W	Nickel-cadmium	0°C~40°C

ORDERING GUIDE

MODEL	MOUNTING	LETTER COLOR	HOUSING COLOR	POWER CONFIGURATION
TP-CH LED Thermoplastic Exit Sign	U Universal	R Red G Green	W White	EM Battery Backup