



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Compact thermoplastic exit sign with rounded corners
- Universal mounting; ships with canopy kit and extra face panel for field-conversion to double face
- Fast, easy installation
- Part of Astralite's quick ship program

### CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance
- Knockout directional indicators

### LAMP

- AllnGaP LEDs with a rated life of 10+ years

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

### BATTERY

- EM option comes standard with nickel-cadmium battery
- Provides a minimum of 90 minutes of illumination upon loss of power
- Operating temperature range: 10-40° C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## TP-U2

COMPACT THERMOPLASTIC EXIT SIGN



## DIMENSIONS

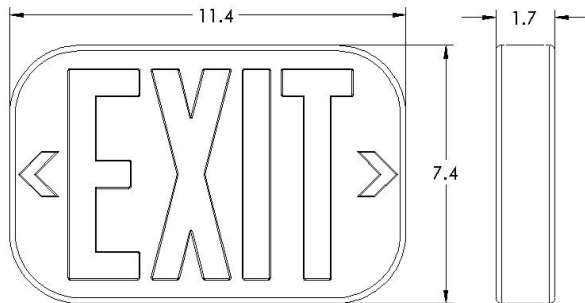

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Wall / Ceiling / End	Nickel-cadmium	UL 924	11.4" W X 7.4" H X 1.7" D

## ORDERING GUIDE

MODEL	MOUNTING	LETTER COLOR	HOUSING COLOR	POWER CONFIGURATION	OPTIONS
TP	U2 Universal	R Red G Green	W White B Black	EM Emergency AC AC Only	SW Special Wording