



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Thermoplastic emergency light
- Designed for wall mounting
- Remote capable: choice of 30W or 50W unit capacity
- Fast, easy installation
- Part of Astralite's quick ship program

### CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Features two adjustable heads

### LAMP

- Utilizes two 1W LED heads in emergency mode; higher wattage lamps are available upon request, consult factory for more options

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout installation
- Brownout protection
- AC indicator light with test switch

### BATTERY

- Lead-calcium battery is standard and provides a minimum of 90 minutes of illumination in emergency mode; Nickel-cadmium battery offered as an option
- Operating temperature range: 10-40° C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY



- 5-year warranty on housing and electronics. Battery is prorated

## TP-400-LED

HEAVY DUTY EMERGENCY BATTERY UNIT



## DIMENSIONS

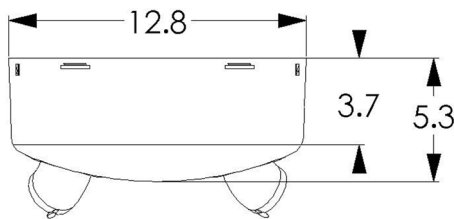

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Wall	Lead-calcium	UL 924	12.8" W X 5" H X 5.3" D

## ORDERING GUIDE

MODEL	TOTAL DC WATTAGE	INTEGRAL LAMPS	VOLTAGE	HOUSING COLOR	OPTIONS
<b>TP-400-LED</b> Emergency Battery Unit	30 <sup>1</sup> 30 Watts 50 <sup>1</sup> 50 Watts	2x1 (2) 1W LED	6 Volts 6 Volts 12 Volts <sup>2</sup> 12 Volts	W White B Black	220 220 VAC Input A <sup>3</sup> Ammeter V <sup>3</sup> Voltmeter SD Self Diagnostics TD <sup>4</sup> Time Delay NC Nickel-cadmium Battery

### Notes:

1. To determine maximum remote wattage, subtract total integral lamp watts from total DC unit wattage
2. Capable of 60W
3. Select one
4. Time delay must specify AC input voltage and delay time in minutes