



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Thermoplastic running man sign
- Designed for ceiling and wall installation
- Fast, easy installation
- Part of Astralite's quick ship program

CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Standard with extra face panel for choice of direction on both stencils

LAMP

- High-quality LEDs provide uniform diffused illumination

ELECTRONICS

- Dual voltage input 120/277V 60Hz
- Test switch and L.E.D. indicator light
- Brownout protection

BATTERY

- Nickel-cadmium battery comes standard
- Provides a minimum of 90 minutes of illumination upon loss of power
- Operating temperature range: 10-40° C

COMPLIANCE

- CSA certified

WARRANTY


- 3-year warranty on housing and electronics. Battery is prorated

TP-RM

THERMOPLASTIC RUNNING MAN SIGN



DIMENSIONS

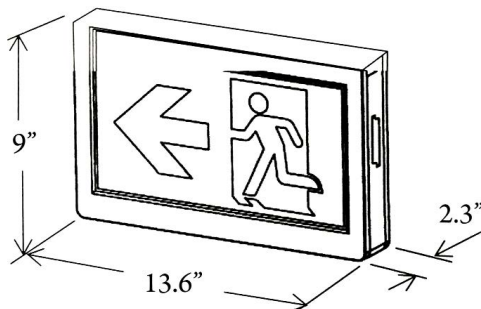

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Wall / Ceiling	Nickel-cadmium	UL 924	13.6" W X 9" H X 2.3" D

ORDERING GUIDE

MODEL	HOUSING FINISH	POWER CONFIGURATION
TP-RM Thermoplastic Running Man Sign	W White	EM Battery Backup