



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Thermoplastic emergency light
- Thin profile design
- Designed for wall mounting
- Fast, easy installation
- Part of Astralite's quick ship program

### CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- LED channel is designed to be adjusted approximately 40° up/down

### LAMP

- LEDs provide 800+ Lumens with a rated lamp life of 10+ years

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

### BATTERY

- Nickel-cadmium battery comes standard
- Provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 10-40° C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## NEO-LED

### EMERGENCY LIGHTING FIXTURE



## DIMENSIONS

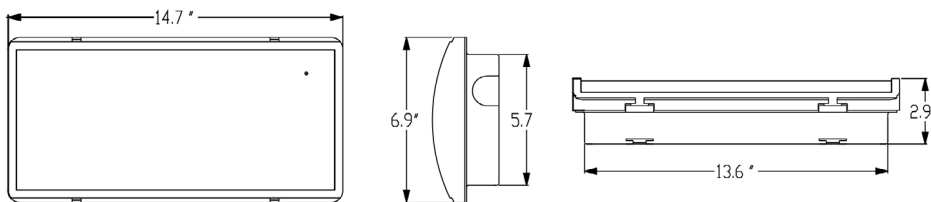

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Surface	Nickel-cadmium	UL 924	14.7" W x 6.9" H X 2.9" D

## ORDERING GUIDE

MODEL

OPTIONS

**NEO-LED**  
Emergency Lighting Fixture

**IR** Infrared Remote Test  
**RE** Recessed Kit  
**SD** Self Diagnostics