



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Steel emergency light with remote capability
- Unit capacity: 18W
- Adjustable heads offer glare-free illumination

CONSTRUCTION

- Rugged 20-gauge steel construction
- Features a mounting plate for easy installation

LAMP

- Utilizes two 1W LED heads in emergency mode; higher wattage lamps are available upon request, consult factory for more options

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout installation
- AC indicator light with test switch
- Brownout protection

BATTERY

- Lead-calcium battery is standard and provides a minimum of 90 minutes of illumination in emergency mode; Nickel-cadmium battery offer as an option
- Operating temperature range: 10 °C to 40 °C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

LG-ST-125-LED

STEEL REMOTE CAPABLE EMERGENCY LIGHT



DIMENSIONS

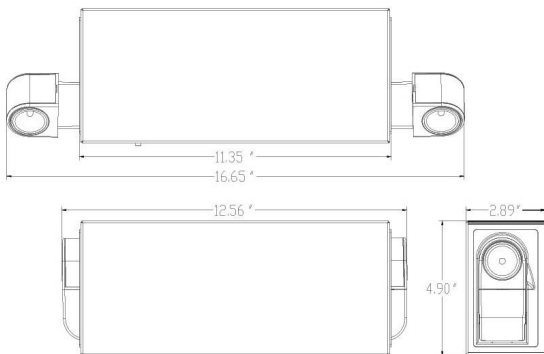

ORDERING GUIDE

MODEL	HOUSING FINISH	OPTIONS
LG-ST-125	B Black W White SP Special Finish	NC Nickel-cadmium Battery 220 220 VAC Input