



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Four-head grid ceiling steel emergency light
- Designed for ceiling mounting in grid ceilings
- Remote capable: choice of 30W, 60W, or 125W unit capacity

CONSTRUCTION

- 16-gauge galvanized steel construction with superb corrosion resistance
- Optional caddy bars fit into a 24" grid ceiling system

LAMP

- Four 1W 6V L.E.D. high-output lamps
- Lamp heads are fully adjustable

ELECTRONICS

- Dual voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- Lead-acid battery is standard, and provides a minimum of 90 minutes of illumination in emergency mode
- Nickel-cadmium battery offered as an option
- Operating temperature range: 10-40° C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

LG-600-LED

FOUR-HEAD GRID CEILING EMERGENCY LIGHT



DIMENSIONS

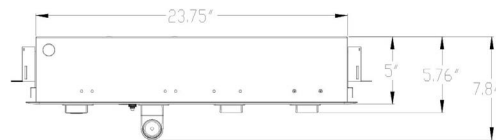

ORDERING GUIDE

MODEL	TOTAL UNIT WATTAGE	INTEGRAL HEADS	DC VOLTAGE	LAMP HEADS/TRIM PLATE	OPTIONS
LG-600-LED Remote-Capable Recessed Emergency Light	30 30W 60 60W 125 125W	4 4 1W L.E.D. Lamps	6 6 Volts	W White B Black BA ¹ Brushed Aluminum	SD ² Self Diagnostics TD ³ Time Delay 220 220 VAC Input CAD-24 Caddy Bar

Notes:

1. Also includes titanium painted plastic lamp heads.
2. Available for 60W version only.
3. Must specify AC input voltage and time delay.