



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Self-contained gimbal emergency light with MR-16 lamp
- Designed for recessed ceiling mounting

CONSTRUCTION

- All-metal housing with universal mounting bars
- Integrated backup battery and test switch

LAMP

- Utilizes one 10W halogen MR-16 in emergency mode
- Also offered with a 1W LED lamping

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout installation
- Brownout protection
- AC indicator LED light

BATTERY

- Lead-Calcium battery is standard, and provides a minimum of 90 minutes of illumination in emergency mode. Nickel Cadmium battery offered as an option



COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY

- 5 -year warranty on housing and electronics. Battery is prorated

DIMENSIONS

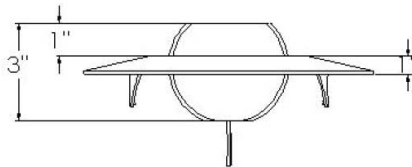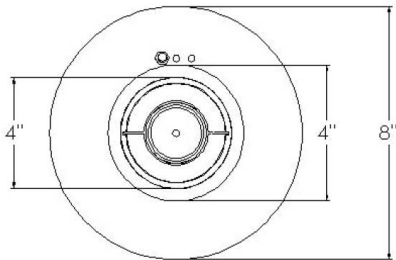

AG-MR

GIMBAL EMERGENCY LIGHT



ORDERING GUIDE

MODEL	TRIM COLOR	OPTIONS
AG-MR Gimbal Emergency Light	W White	LED 1W LED