



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Steel edgelit EXIT-EM combination unit with 8" letters
- Designed for use in New York City
- Features two telescoping LED heads
- Designed for recessed ceiling mounting only

### CONSTRUCTION

- Durable metal construction
- Field-selectable chevron directional indicator offers a choice of direction on-site

### LAMP

- Utilizes two 1W LED lamps in emergency mode
- EXIT face is illuminated by long-lasting high-output AllnGaP LEDs with a rated life of 10+ years

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout installation
- Brownout protection
- AC indicator light with test switch

### BATTERY

- Nickel-cadmium battery is standard
- Operating temperature range: 0 °C to 40 °C
- Provides a minimum of 90 minutes of illumination in emergency mode

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## LG-NY-500-LED

NYC APPROVED EXIT-EM COMBINATION UNIT



## DIMENSIONS

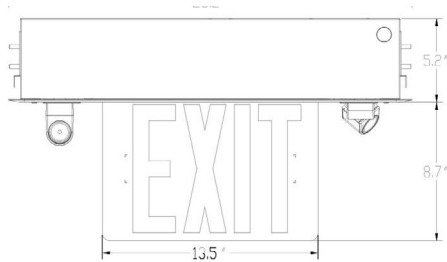

Material	Mounting	Battery	Code Compliance	Dimensions
Steel	Ceiling	Nickel-cadmium	UL 924	23.75" W X 13.9" H X 6.3" D

## ORDERING GUIDE

MODEL	NO. OF FACES	COLOR/BACKGROUND	TRIM FINISH	OPTIONS	
LG-NY-500-LED 8" Combo Edge Lit Exit	1	Single Face	<b>RC<sup>1</sup></b> Red on Clear <b>RW</b> Red on White <b>RM</b> Red on Mirrored <b>RB</b> Red on Black <b>GC<sup>1</sup></b> Green on Clear <b>GW</b> Green on White <b>GM</b> Green on Mirrored <b>GB</b> Green on Black	<b>BA</b> Brushed Aluminum <b>WH</b> Powder Coated White <b>BLK</b> Powder Coated Black <b>DB</b> Dark Bronze <b>BR</b> Brass Type Face Plate	<b>REM</b> 10W 6V Remote Capability <b>SD</b> Self Diagnostics <b>220</b> 220 VAC Input
	2	Double Face			

### Notes:

1. Single face only