



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Contractor's choice thermoplastic exit sign
- Universal mounting; ships with canopy kit and extra face panel for field-conversion to double face
- Fast, easy installation
- Part of Astralite's quick ship program

CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance
- Knockout directional indicators

LAMP

- AllInGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- EM option comes standard with nickel-cadmium battery
- Provides a minimum of 90 minutes of illumination upon loss of power
- Operating temperature range: 10-40° C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

LG-U

CONTRACTOR'S CHOICE THERMOPLASTIC EXIT SIGN



DIMENSIONS

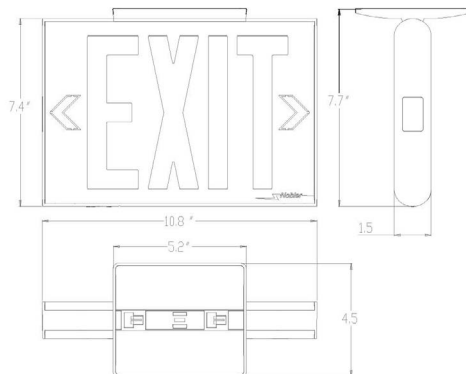

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Ceiling / End / Wall	Nickel-cadmium	UL 924	10.8" W X 7.4" H

ORDERING GUIDE

MODEL	LETTER COLOR	HOUSING COLOR	POWER CONFIGURATION	OPTIONS
LG-U	R Red G Green	W White B Black T Titanium	AC AC Only EM Emergency	220 220 VAC Input PK ¹ Pendant Kit

Notes:

- Order separately; see pendant kit (PK) specification sheet for more information