



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Thermoplastic edgelit exit sign
- Thin-profile design with no visible screws or fasteners
- Fast, easy installation; fixture mounts to a standard electrical box
- Universal ceiling or wall mount; end mount kit offered as an option

CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Completely enclosed exit panel prevents the separation that usually happens over time
- Field installed directional chevrons
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

LAMP

- AllnGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- EM option comes standard with nickel-cadmium battery
- Provides a minimum of 90 minutes of illumination upon loss of power


COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY

- 5-year warranty on housing and electronics. Battery is prorated

DIMENSIONS

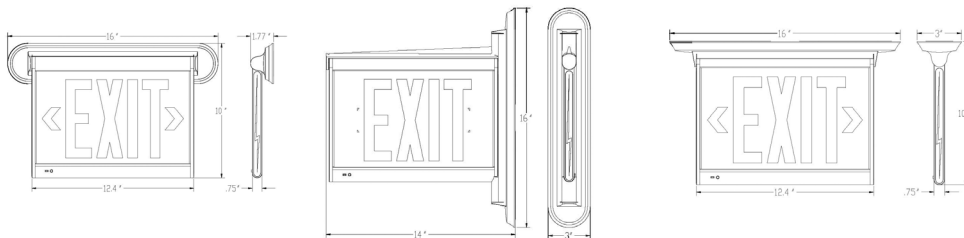

LG-400

THERMOPLASTIC EDGE-LIT EXIT SIGN



Material	Mounting	Battery	Code Compliance
Thermoplastic	Wall / Ceiling / End	Nickel-cadmium	UL 924

ORDERING GUIDE

MODEL	NO. OF FACES	LETTER COLOR	HOUSING COLOR	POWER CONFIGURATION	OPTIONS
LG-400	1 2	R Red G Green	W White B Black	AC AC Only EM Battery Backup	END End Mount Kit SW Special Wording