



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Steel emergency light designed for use in New York City
- Adjustable heads offer glare-free illumination

### CONSTRUCTION

- Rugged 20-gauge steel construction
- Features a mounting plate for easy installation

### LAMP

- Utilizes two 1W LED heads in emergency mode; higher wattage lamps are available upon request, consult factory for more options

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout installation
- AC indicator light with test switch
- Brownout protection

### BATTERY

- Nickel Cadmium battery is standard and provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 0 °C to 40 °C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## LG-ST-100-LED

STEEL EMERGENCY LIGHT WITH TWO HEADS



## DIMENSIONS

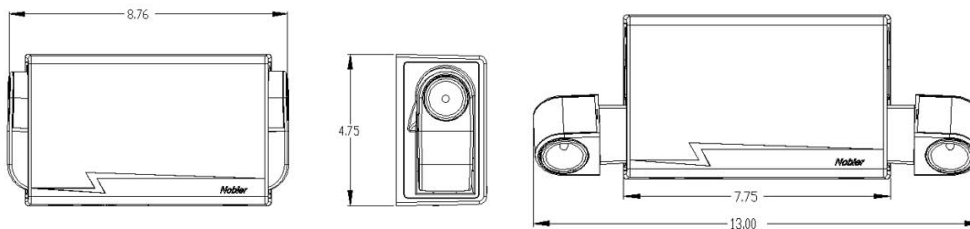

## ORDERING GUIDE

MODEL

HOUSING FINISH

LG-ST-100-LED

- W** White Housing
- B** Black Housing
- SP** Special Finish