



TYPE _____


CATALOG# _____

LG-200

NOBLER SERIES MR-11 Combination Unit With Two 7 Watt Halogen Emergency Lights



DIMENSIONS

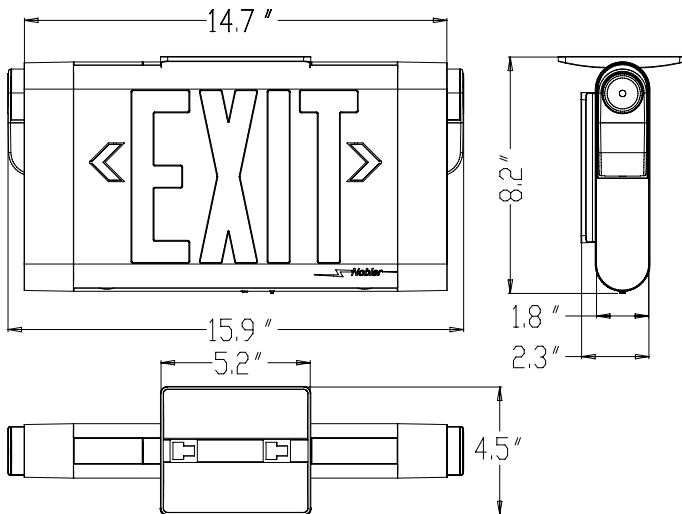

GENERAL DESCRIPTION

This Combination Unit from the Nobler Series family features all and more of what you expect and demand in a Life Safety product. The sleek shallow height (8.00") will blend nicely into any environment with no worries associated as to whether it will fit above the door or not. The LG-200 offers a smooth contoured transition from the exit to the two emergency heads while providing the flexibility of back, or canopy mount with an additional exit stencil standard (an end mount version with one head is also available, see LG 200E). Emergency heads are designed to be adjusted either forward and/or backwards to provide 360 deg. illumination as a standard. Patent Pending.

HOUSING

UV Stable Thermo- plastic flame retardant meets UL standard 95-VA. Standard white, black and Titanium finish (matches all products in same family) features quick and easy installation via snap in design. Unit installs in less than 5 minutes and is prewired at factory. Replaceable chevron directional indicator, offers choice of direction on both stencils.

ILLUMINATION

Two 7 Watt 6V MR11 High output halogen lamps lamps mounted in precision formed photometrically optimized reflector assemblies exceed illumination required by UL 924. Long lasting high output ALIn GaP LED's with the highest performance and least degradation available in the market with a rated life of 10 years plus illuminates the exit face

ELECTRONICS AND BATTERY

Dual Voltage 120/277 VAC input facilitates the fully automatic Solid State charging system which features (LVD) Low Voltage Disconnect, AC lockout installation, brown out protection, AC indicator LED light with push to test button standard. The maintenance free Lead Calcium battery provides a minimum of 90 minutes of illumination in emergency mode with an average life of 5 years. Optional Nickel Cadmium battery & 220V input also available.

CODE COMPLIANCE

Tested and Listed to UL 924 for damp location, meets or exceeds NFPA, NEC, and OSHA illumination standard.

WARRANTY

LIFETIME Limited warranty on housing and electronics
5 year pro rated warranty on Sealed Lead Acid battery.
7 year pro rated warranty on Nicad battery

Patent Pending

NOBLER SERIES™

LG-200

Model

Letter
Color

R Red
G Green

Housing
Color

B Black
W White
Ti Titanium

—

Factory Installed
Options

220 220 VAC Input
NC Nicad Battery



NS 005A

20 Pocono Rd. Brookfield, CT. 06804 ~ Tel: 203-775-0172 ~ Fax: 203-775-0797
www.Astralitelighting.com

NS 5