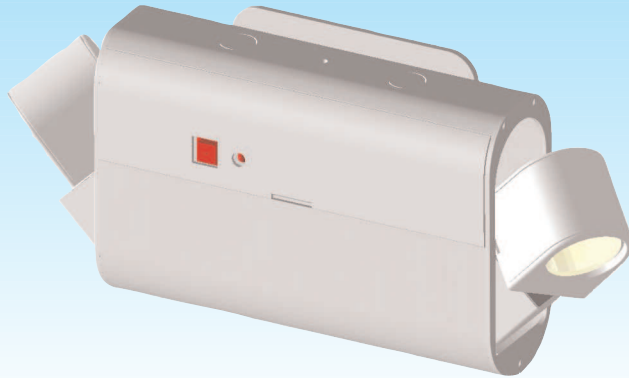


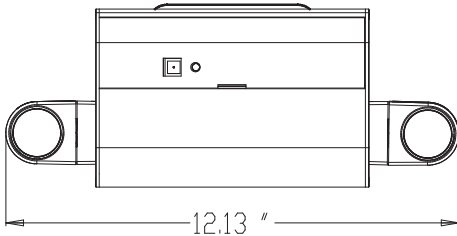


PATENT PENDING

LG-800-LED-REM
DIMENSIONS


LG-800-LED-REM
Remote Capable
Extruded Aluminum Two Head Unit
NOBLER SERIES MR-11 LED size head
Two 100 lumens LED Emergency Lights

GENERAL DESCRIPTION

The LG-800-LED-REM provides a thin profile design that complements upscale commercial or retail architectural applications. Redefining the aesthetic standards the industry has settled for in the past, the Nobler Light Style Series product offers the high performance of two 100 lumen 100,000 hour high power white LED's. Minimizes the quantities needed for illuminating paths of egress. This fully adjustable Life Safety product features two patented MR-11 size Emergency LED heads that are designed to be adjusted either forward and/or backwards to provide 360 deg. illumination as a standard. It is designed to provide the highest levels of glare free illumination while blending nicely into any environment.

HOUSING

The LG-800-LED-REM consists of an extruded aluminum body. Emergency LED heads UV Stable Thermo- plastic flame retardant meets UL standard 95-VA. White, black and Titanium finish (matches all products in same family). Unit installs in less than 5 minutes and is prewired at factory. Optimal pendant and ceiling mount kits.

ILLUMINATION

Mounted in precision-formed, fully adjustable assemblies. Two 100 lumen, color temperature 6000K, 100,000 hour high power white LED's exceed illumination required by UL 924 with better space to mounting criteria than the industry standard 5.4 Watt incandescent offering. At 100 lumens the LED is **equivalent to a 10 W halogen lamp**

REMOTE HEADS

Can remote two LED heads. Refer to LG-REM-LED cut sheet and specify 6V option

ELECTRONICS & BATTERY

Standard Input is selectable for dual voltage 120 or 277 60Hz. Solid State charging system features Low Voltage Disconnect (LVD), AC lock-out installation, brown out protection, and standard AC indicator LED light. 6V **Nickel Cadmium** battery provides a minimum of 90 minutes of illumination in emergency mode.

CODE COMPLIANCE

Meets or exceeds UL 924, NFPA, NEC, and OSHA standards.

WARRANTY


5 year pro rated warranty on Nicad battery

NOBLER SERIES®

LG-800-LED-REM
Model

Housing Color

*BA	Brushed Aluminum
WHT	Powder Coated White
BLK	Powder Coated Black
DB	Dark Bronze Finish
BR	Brass


Factory Installed Options

220	220 VAC Input
PK	Pendant kit
CC	Ceiling Canopykit

